

TEST REPORT

EN – 17092:2020

Report	Code:	ANCCP_Alpha-Softshell jacket_251002_rev1			
	Emission date:	21/10/2025			
Client	Name:	Giuseppe Gazzerro			
	Address:	(Via dello Struggino, 6, Livorno, Toscana 57121)			
Sample	PPE model:	Alpha-Softshell jacket			
	Origin:	ANCCP			
	Arrival date:	02 nd October 2025	Testing date:	02 nd October 2025	
				21 st October 2025	
Test Site	OMEGA ITALY				

Garment Classes to “Protective clothing for motorcycle riders”; to EN17092-2020 series

General Garment Description	Class	Impact Protectors
HEAVY WEIGHT	AAA	Elbow & Shoulder / Knee & Hip
MEDIUM WEIGHT	AA	Elbow & Shoulder / Knee & Hip
LIGHT WEIGHT (HOT ENVIRONMENT)	A	Elbow & Shoulder / Knee
ABRASION PROTECTION GARMENTS	B	No
PROTECTOR ENSEMBLE GARMENTS (UNDER OR OVERGARMENTS)	C	At least one protector type

Requirements	AAA			AA			A			B			C		
ZONES	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Impact Abrasion	707	442	265	412	265	147	265	147	n/a	265	147	n/a	n/a	n/a	n/a
Seam strength	12	12	8	8	8	6	6	6	4	6	6	4	6	6	4
Tear strength	50	50	35	40	40	30	35	25	25	35	25	25	35	25	25
Cuff restraint	Jacket cuff			Jacket cuff			Jacket cuff			Jacket cuff			Jacket cuff		

Washing and Dry Cleaning (ISO 13688:2013): 5 cleaning cycles at 30°C. Dry Cleaning doesn't apply.

CONCLUSION: The garment PASS the requirements of the CLASS AA

The garment has been tested in the conditions as supplied by the client.

Laboratory Technician
 (E. Spazzarini)


Laboratory Manager
 (J. P. Cuesta Ruiz)




Code: **ANCCP_Alpha-Softshell jacket_251002_rev1**

M49 rev.9 31072023

1. IMPACT PROTECTORS

Tested in accordance with 4.2 of the EN17092-2 (level AAA), EN17092-3 (level AA), EN17092-4 (level A), EN17092-6 (level C)

Impact Energy Absorption (4.2.1)

Impact Protectors present for Elbow, Shoulder

Result: Certified EN 1621-1; **PASS**

Impact Protector Location (4.2.2)

Result: **PASS**

2. IMPACT ABRASION RESISTANCE

Tested in accordance with 4.5 of the EN17092-1; 9 samples divided in 3 Sample groups (Sample #)

Construction		1 Softshell + polyester 600D + Kevlar + micromesh + Air mesh (zona 1 class AA)				
	Speed	Time to stop	Distance to stop	holes ≤ 5mm	RESULT	
Sample #	[r.p.m.]	[s]	[m]	[PASS / FAIL]	CLASS	Zone
1	412	2,6	22,040	PASS		
2	412	2,7	23,271	PASS	AA	Zone1
3	412	2,6	22,749	PASS		
The evaluation of the construction is only performed on the closest layer to the body						



3. SEAM STRENGTH

Tested in accordance with 4.4 of the EN17092-2 (level AAA), EN17092-3 (level AA), EN17092-4 (level A), EN17092-5 (level B), EN17092-6 (level C)

Seam	1	Main zip	S.T. Zip	RESULT
Sample #	[N]	[N/mm]	Min	CLASS Zone
1	616,2	24,65		
2	701,8	28,07	23,01	
3	575,2	23,01		AAA 1 & 2

Failure Mode: Seam breaks

Seam	2	Textile zip + softshell	S.T. 4.1	RESULT
Sample #	[N]	[N/mm]	Min	CLASS Zone
1	254,3	10,17		
2	300,5	12,02	10,17	AA 1 & 2
3	272,8	10,91		AAA 3

Failure Mode: Seam breaks

Seam	3	Softshell + softshell	S.T. 5.2	RESULT
Sample #	[N]	[N/mm]	Min	CLASS Zone
1	367,3	14,69		
2	404,5	16,18	12,47	
3	311,8	12,47		AAA 1 & 2

Failure Mode: Seam breaks

Seam	4	Textile zip + softshell	S.T. 5.1	RESULT
Sample #	[N]	[N/mm]	Min	CLASS Zone
1	246,7	9,87		
2	289,6	11,58	9,87	AA 1 & 2
3	267,2	10,69		AAA 3


Failure Mode: Seam breaks




Pocket Seam p1 Air mesh + micromesh			S.T. 5.2	
			Pocket seam ≥ 4 N/mm	
Sample #	[N]	[N/mm]	Min	RESULT
1	174,7	6,99		
2	147,4	5,90	5,90	PASS
3	153,2	6,13		
Pocket Seam: Pocket construction that keeps the Protectors inside the Garment				

Failure Mode: Textile breaks

See the following photographs for the seam description,

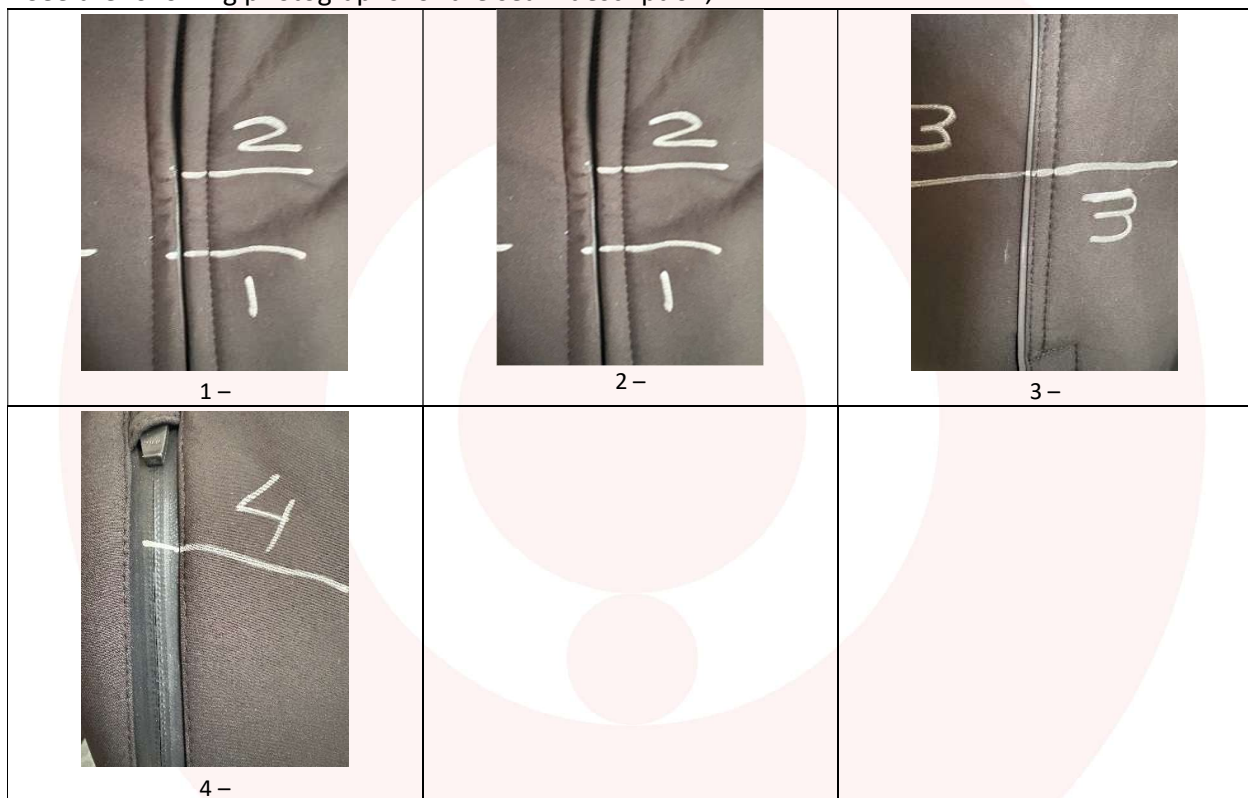

 p1-		
--	--	--

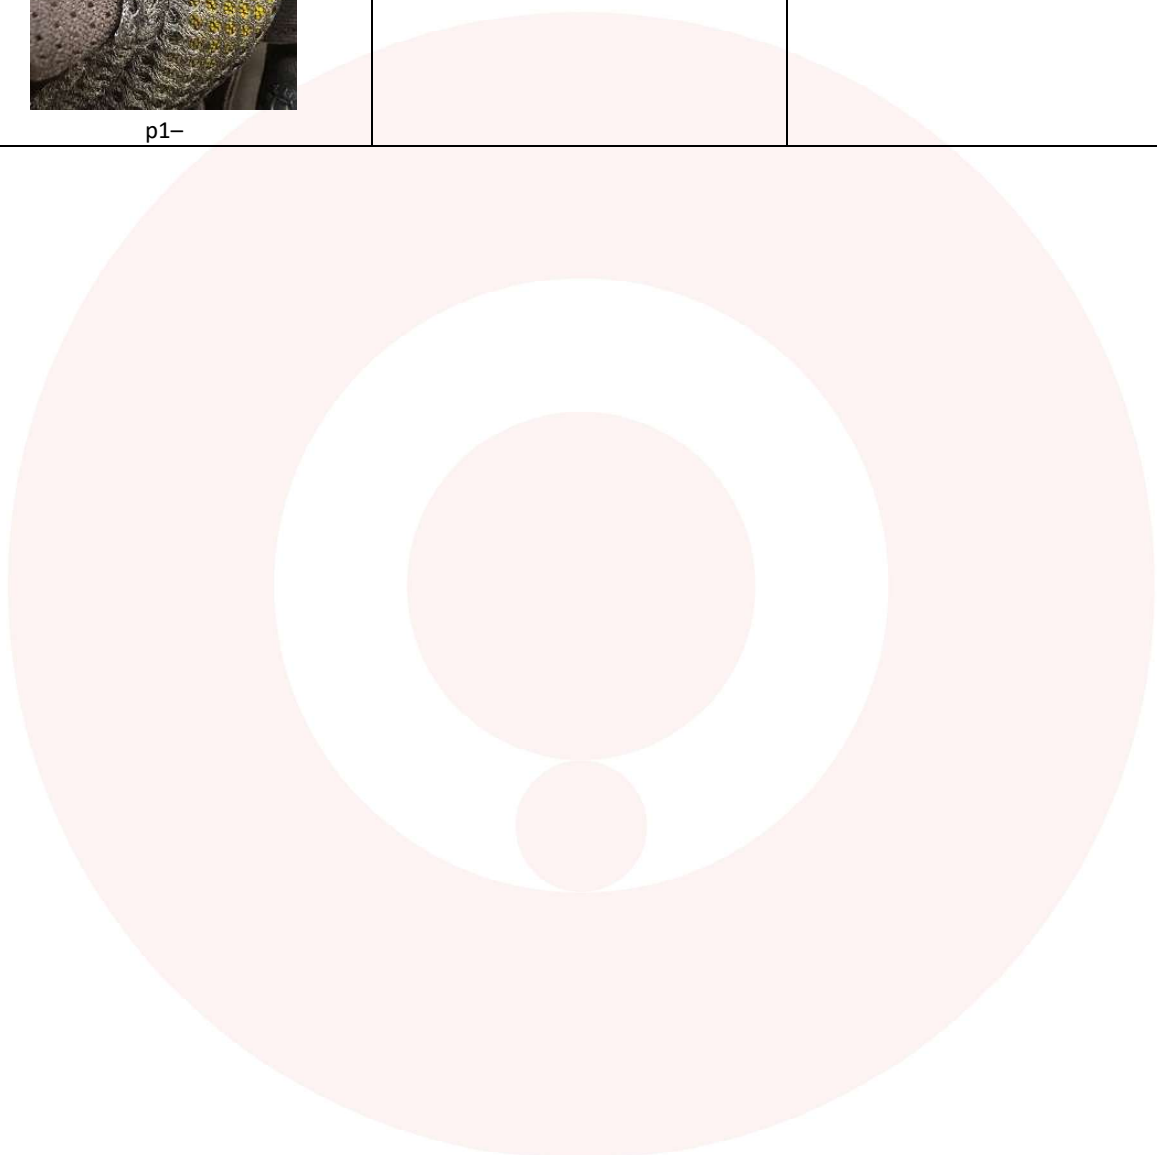

4. TEAR STRENGTH

Tested in accordance with the 4.5 of the EN17092-2 (level AAA), EN17092-3 (level AA), EN17092-4 (level A), EN17092-5 (level B), EN17092-6 (level C) equivalent to the EN 4674-1 method B (for textiles) and EN 3377-1 (for leather)


Material 1 Softshell						
Orient.	#	[N]	Average	CLASS	Zone	CLASIFICATION
	1	79,0		A	1	A 1
X	2	90,1	87,23	AA	1&2	AA 1&2
	3	92,6		AAA	1&2	AAA 1&2
	4	82,7		A	1	
Y	5	94,0	87,47	AA	1&2	
	6	85,7		AAA	1&2	

Pocket Material p1 Air mesh				
#	#	FORCE [N]	Average	Tear Strength ≥ 10 N RESULT
	1	31,5		
X	2	33,0	34,23	PASS
	3	38,2		
	4	29,1		
Y	5	29,7	31,13	PASS
	6	34,6		

Pocket construction that keeps the Protectors inside the Garment

Pocket Material p2 micromesh				
#	#	FORCE [N]	Average	Tear Strength ≥ 10 N RESULT
	1	21,1		
X	2	22,1	22,13	PASS
	3	23,2		
	4	14,1		
Y	5	15,7	15,13	PASS
	6	15,6		

Pocket construction that keeps the Protectors inside the Garment

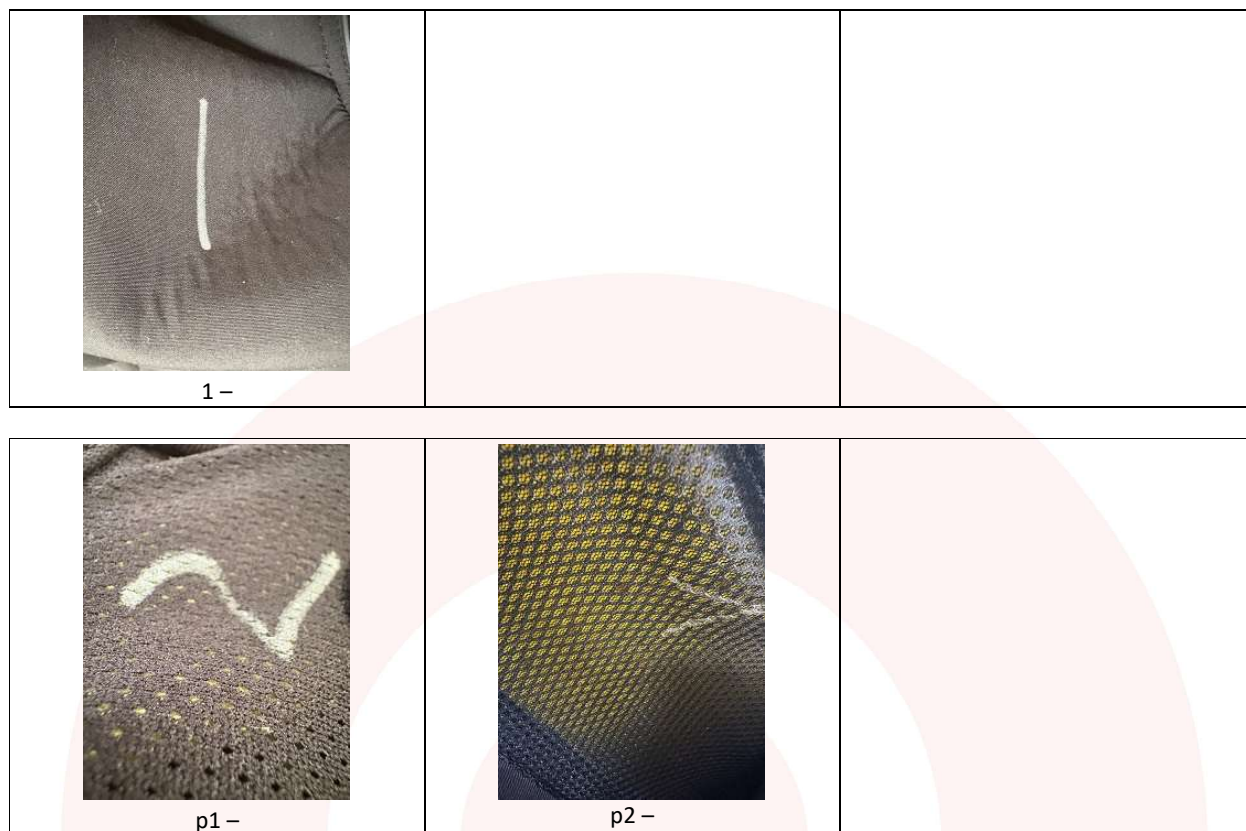

5. RESTRAINT

Tested in accordance with 5.5 of the EN17092-1

Restraint systems, which join sleeves directly to gloves or which join trousers directly to boots, shall be exempt from restraint testing.

When tested in accordance with the methods described in **clause 5.5** the garment shall meet the following requirements, as appropriate,

Restraint of impact protectors

Test Result: **PASS**

Connection between two-piece suits

Test Result: **NOT APPLICABLE**

Sleeve restraint

Tested in accordance with 5.5.3.2 of the EN17092-1. NOT APPLICABLE FOR TROUSERS

Omega ID	Samples	Cone	N (50±2)	RESULT (Pass/Fail)
1 – sleeves	M - MEN version	4	60	PASS
2 – sleeves	M - MEN version	4	60	
1 – sleeves	M - LADY version	3	60	PASS
2 – sleeves	M - LADY version	3	60	

Garment sleeve restraint

In accordance with the 4.6.3 of the EN17092-2 (level AAA), EN17092-3 (level AA), and EN17092-4 (level A); the 4.5.3 of EN17092-5 (level B); the 4.6.2 of EN17092-6 (level C)

An adjustable restraint system shall be incorporated into the wrist or cuff

Test Result: **PASS**

6. GARMENT PERFORMANCE AFTER CLEANING

Garments shall be cleaned according to **EN 13688 Clause 5.2** prior to testing and shall conform to the requirements specified in clauses **4.3. – 4.8** after the required number of cleanings.

Note: It is not necessary to carry out repeat testing after cleaning for garments where only trivial surface cleaning treatments, which are considered not to affect the performance of the garment are recommended, for example wiping with a damp sponge.

Washing procedure (ISO 6330:2012): 5 cleaning cycles at 30°C. Dry Cleaning doesn't apply. Washing Machine Type A1; Line Dry in Open Air; Detergent type 3. Total washing mass 2.06kg without ballast

Dimensional stability: the variation in dimensions shall not exceed 5%

Test Result: **NOT APPLICABLE**

7. RISK CATEGORY ZONING

Tested in accordance with 5.2 of the EN17092-1

Materials and construction are allowed in Zone 2, which only meet Zone 3 requirements, for the purposes of elasticity and ventilation. The total area permitted of Zone 3 materials and construction in Zone 2 shall be calculated according to Table 6, where “W” = the waist circumference “E” (in cm),

Garment	Part of Garment	See Location Reference	Zone 3 area permitted in Zone 2
One-piece Suit	Above Waistline	EN 17092-1:2020, 3.2	W x W x 0,048
One-piece Suit	Below Waistline		
Two-piece Suit	Above Waistline		
Two-piece Suit	Below Waistline		
Jacket Separates	Above Waistline		
Trouser Separates	Below Waistline	EN 17092-1:2020, 3.3	

PASS there are not Intrusions of Zone 3 materials in the Zone 2

Calculation and location of the secondary reference points. Measured from primary reference point

		Secondary reference point 1		Secondary reference point 2	
Circumference	Ref. Point	Point	Located at % of circumference	Point	Located at % of circumference
A (Neck)	A	A1	20%	A2	80%
B (Shoulder)	B	B1	24%	B2	64%
C (Elbow)	C	C1	40%	C2	60%
D (Wrist)	D	D1	50%	D2	70%
E (Waist)	E	E1	12.5%	E2	87.5%
F (Knee)	F	F1	35%	F2	80%
G (Ankle)	G	G1	20%	G2	45%

Note: The calculation of secondary reference points shall be to the nearest **0.5 cm**.

Operators: Insert Operator's Name

See ANNEX A for identification of Zone 1, Zone 2 and Zone 3 in the garment.



8. FIT AND ERGONOMICS

Tested in accordance with 5.6 of the EN17092-1

VERSION:	MEN	LADIES
Size tested:	M	M
Chest [cm] / Waist [cm]:	90	84
External dimensions of the garment		

Pre-donning assessment			(1)
1.	a.	Do any metallic, ceramic, plastic or similar hard materials present as studs, staples, rivets, plates, or other structures, used to form part of the protective layer of the garment, pose a hazard to the user?	Yes No
	b.	Does the construction of the garment protect the body from such structures when necessary?	Yes No
	c.	When such features do penetrate the protective layer, Are the inner surfaces of these features are flush to the protective layer?	Yes No
	d.	Is the garment free from any rough, sharp or hard components, or other features that might cause irritation or that would make riding hazardous?	Yes No
2.		Is the garment sized in accordance with the manufacturer's fit information and in accordance with the fit instructions supplied in the manufacturer's information notice for users, or according to EN ISO 13688:2013 or is it made-to-measure?	Yes No
Donning			
3.	a.	Is It possible to put on the garment and to operate the fasteners and adjusters without impediment?	Yes No
	b.	Is it possible to don gloves and helmet while wearing the garment?	Yes No
Off-bike activities			
4.		Can the following be carried out without difficulty?	
	a.	Walking on the flat.	Yes No
	b.	Mounting and dismounting a motorcycle or a device that mimics one.	Yes No
Riding actions and compatibility with other Items of PPE			
5.		Is it possible to perform the following without difficulty?	
	a.	Sit astride a motorcycle or device that mimics it, while adopting a riding position.	Yes No
	b.	Make the body movements and position changes necessary to control the motorcycle.	Yes No
	c.	While holding both handlebar grips, turn the head to look to the rear.	Yes No
6.		Are all impact protectors correctly positioned in such a way as to protect the appropriate body parts (refer to clause 5.3.1) whilst not preventing adequate movement of limbs or impeding the rider's effective control of the motorcycle?	Yes No
7.		Is the garment free of unnecessary tightness, which restricts body movement or blood flow in such a way as to prevent effective operation of the motorcycle?	Yes No
8.		Does the garment fit without creating dangerous interference with the helmet?	Yes No

Operator: MAN (84cm) Lady (76cm)

Test Result: **PASS**

Vents

Openings created by vents shall be completely covered by SSL material that meets the applicable zone requirements or the vent opening shall be filled with material that meets the applicable zone requirements

Test Result:

Vents are completely covered by SSL material: **PASS**

Its opening is restricted to 4 cm or less in width: **YES**

PASS: the vent opening is filled with SSL material

Pockets

Pockets creating an opening in the SSL shall have SSL material inside which fills the exposed opening and extends along the interior of the pocket beyond the opening at least an additional 3cm. If the pocket crosses over two zones, the material filling the exposed opening shall meet the higher zone requirements, if applicable.

Test Result: **PASS**

Use of Open Mesh Materials

Mesh materials that are woven or knitted with any openings greater than 5 mm in any direction shall not be used as the only layer of the SSL

Test Result: **PASS**




ANNEX A: GARMENT IMAGES



ZONE 1 – around Shoulder, Elbow

ZONE 2 & ZONE 3 – See the following image for the identification of Zones 2 & 3

IDENTIFICATION OF ZONES

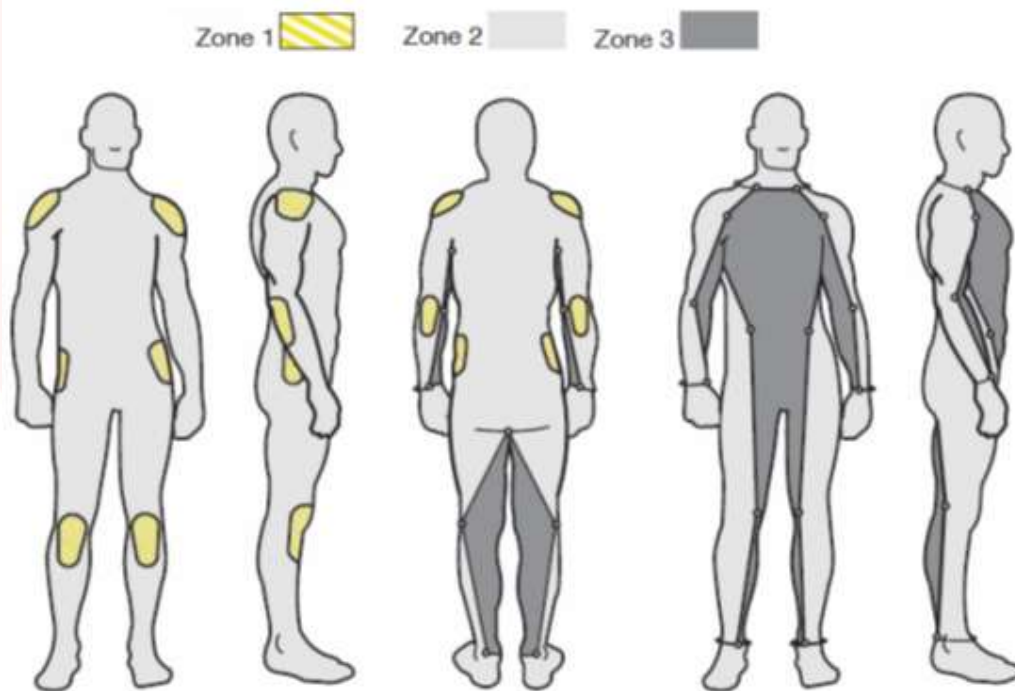

END OF REPORT



Code: **ANCCP_Alpha-Softshell jacket_251002_rev1**

M49 rev.9 31072023

This report concerns only the tested samples and it cannot be partially reproduced without prior written permission from OMEGA

ITALY: Strada Comunale Savonesa n.9 / 15057 Tortona (AL) / Italy / Tel. 0039-0131-860220 / VAT 01828300069

CHINA: Room 103, No.455-3, Second Ring South Road | Tong'an District, Xiamen, Fujian, 361100 | China

ANNEX: EQUIPMENT

Used Machine	Identifier /Manufacturer	Expiry Date
Dynamometer	M0404 (ACQUATI)	12.12.2027
Darmstadt	M0403 (DERTECH)	19.06.2026

Decision Rule: Omega applies a binary decision rule which applies when the result is limited to two choices (PASS or FAIL). More in detail a Binary Statement Simple Acceptance Rule (w=0) as described in the reference Guide Line: ILAC-G8:09/2019.

